

New Feature!

MT2 Over-the-Air (OTA) Module for the DISH Network VIP[®] 222k and VIP[®] 722k Satellite Receivers

Overview

You can now purchase an MT2 Over-the-Air (OTA) Module to connect your over-the-air (OTA) antenna directly to your ViP222k or ViP722k DVR satellite receiver. View local, digital, over-the-air channels directly through your satellite receiver by integrating the OTA channels into your Program Guide. The MT2 OTA Module adds two digital over-the-air tuners (using one port) and a Channel 3-4 coaxial output. The Channel 3-4 Output (CH 3-4 OUT) lets you view TV1 content on a standard-definition TV.

Getting Started

1. Purchase an MT2 OTA Module directly from DISH Network by calling 1-888-241-2205.
Visit www.dishnetwork.com for more information.

Note: The MT2 OTA Module is only compatible with the ViP222k and ViP722k HD satellite receivers.

2. Install the MT2 OTA Module in your receiver by following the Installation Instructions provided with the module. The MT2 OTA Module is installed in the port on the left side of the receiver's back panel (see image below).



Rear panel of a ViP722k with an OTA module partially installed


The information in this document may change without notice.

3. OTA channels must be scanned into the receiver after installing the module.

Note: Program information for over-the-air channels will display in the Program Guide only if the customer subscribes to DISH Network local channels.

4. Selection of Channel 3 or 4 (TV1 out) is made within the receiver's Modulator Setup screen.

Note: An OTA antenna must be installed to use the Module. A satellite signal and a DISH Network programming subscription is required to operate the OTA module.

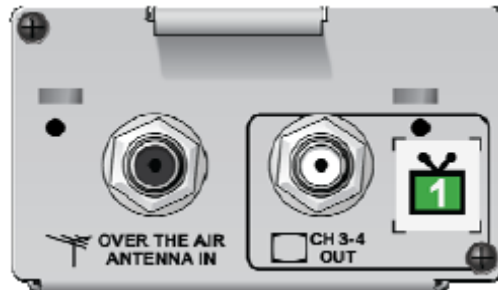

Close up image of the front of the OTA Module